

Firmware update on STB MAG260

Actual firmware for STB MAG260 could be download here:

[STB MAG260 A20](#)

[STB MAG260 A10](#)

Updating from Settings

- **1.** Open "Settings"
- **2.** Open "About set-top box"
- **3.** Open "System update"
- **4.** Open "View updates"
- **5.** Choose necessary firmware and press "Download"
- **6.** After downloading there will "Accept" message. If there is no need in updating (or some another reason) then you must press "Cancel" during 10 seconds. Otherwise it will be automatically updated.

Updating from USB device

- **1.** Open [Recovery mode](#)
- **2.** Choose necessary variant of updating depending on which USB port used:

In case if front port is used:

- apply update from USB storage connected to front

In case if back port is used:



- apply update from USB storage connected to back

- **3.** Choose file and wait for autoupdate.

Firmware updating using SD card

- **1.** Download and unzip [.zip](#) archive.
- **2.** Connect MicroSD to PC and record image using [HDDRawCopy](#) utility.

[Work with HDDRawCopy](#)

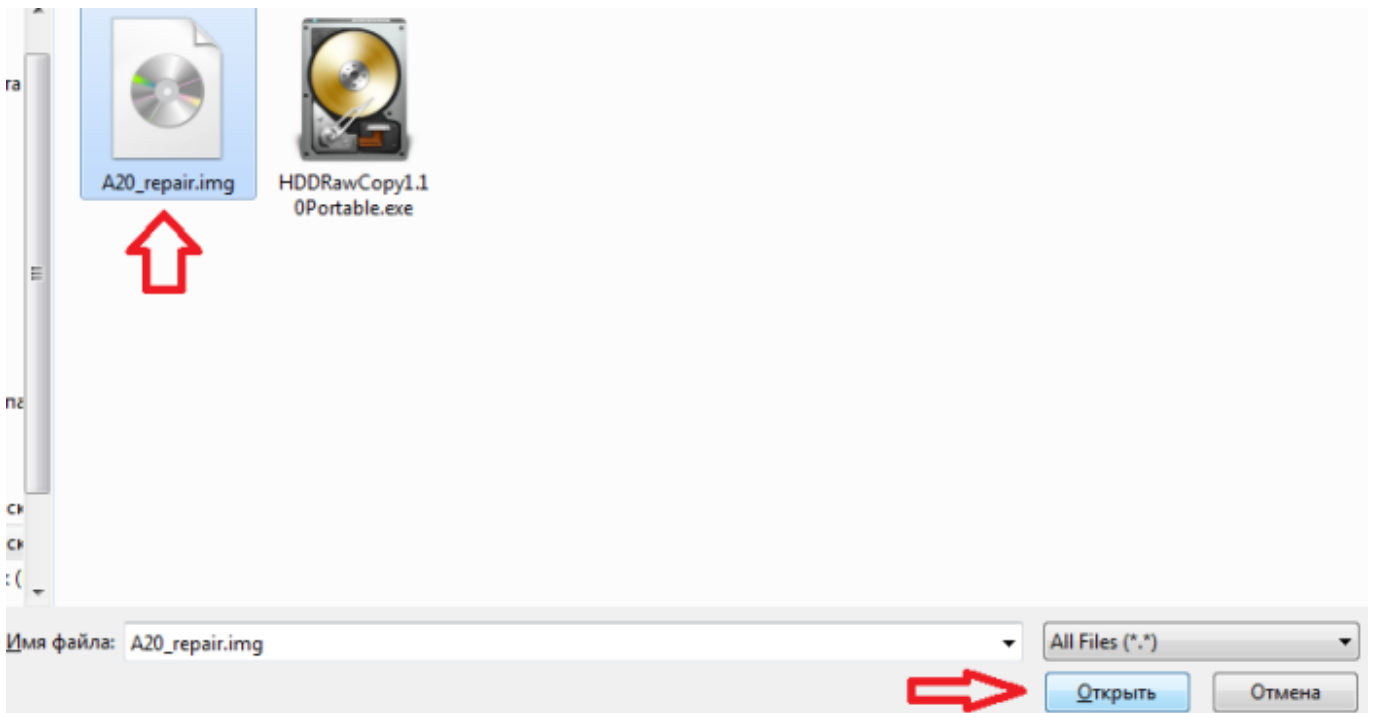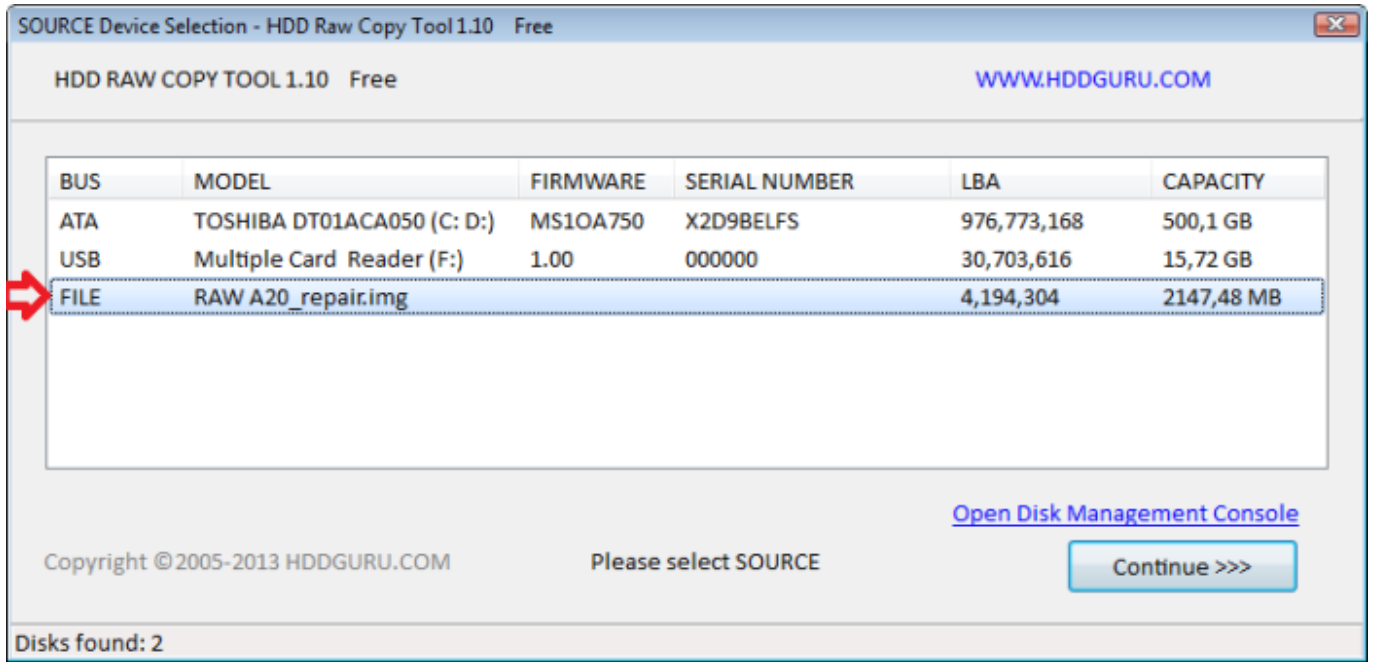


SOURCE Device Selection - HDD Raw Copy Tool 1.10 Free

HDD RAW COPY TOOL 1.10 Free WWW.HDDGURU.COM

BUS	MODEL	FIRMWARE	SERIAL NUMBER	LBA	CAPACITY
ATA	TOSHIBA DT01ACA050 (C: D:)	MS10A750	X2D9BELFS	976,773,168	500,1 GB
USB	Multiple Card Reader (F:)	1.00	000000	30,703,616	15,72 GB
FILE	RAW A20_repair.img			4,194,304	2147,48 MB

[Open Disk Management Console](#)

Copyright ©2005-2013 HDDGURU.COM Please select SOURCE 


Disks found: 2

TARGET Device Selection - HDD Raw Copy Tool 1.10 Free



HDD RAW COPY TOOL 1.10 Free WWW.HDDGURU.COM

BUS	MODEL	FIRMWARE	SERIAL NUMBER	LBA	CAPACITY
ATA	TOSHIBA DT01ACA050 (C: D:)	MS10A750	X2D9BELFS	976,773,168	500,1 GB
USB	Multiple Card Reader (F:)	1.00	000000	30,703,616	15,72 GB
FILE	Double-click to open file				

[Open Disk Management Console](#)

Copyright ©2005-2013 HDDGURU.COM Please select TARGET 

Disks found: 2

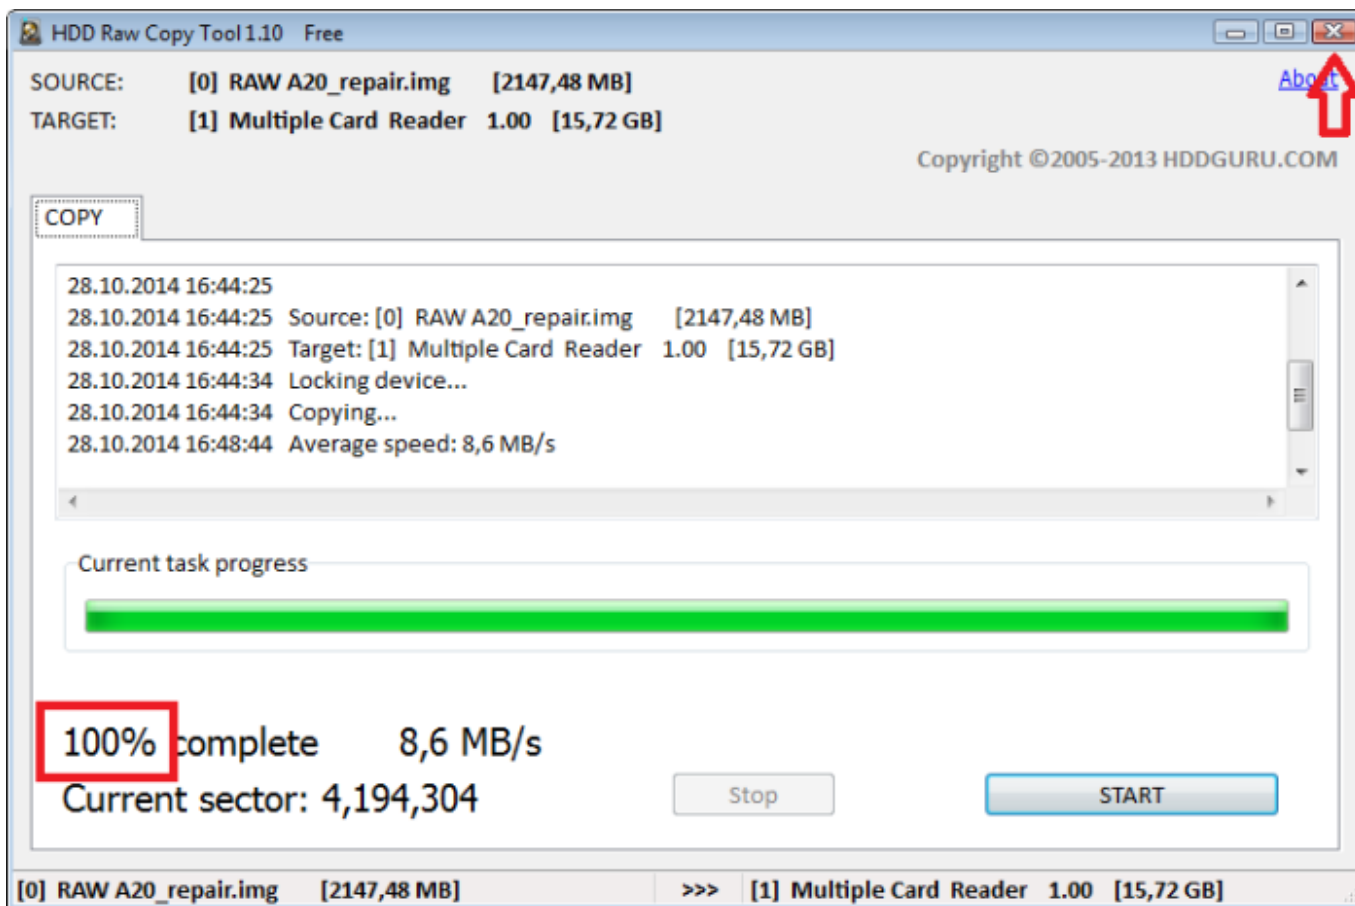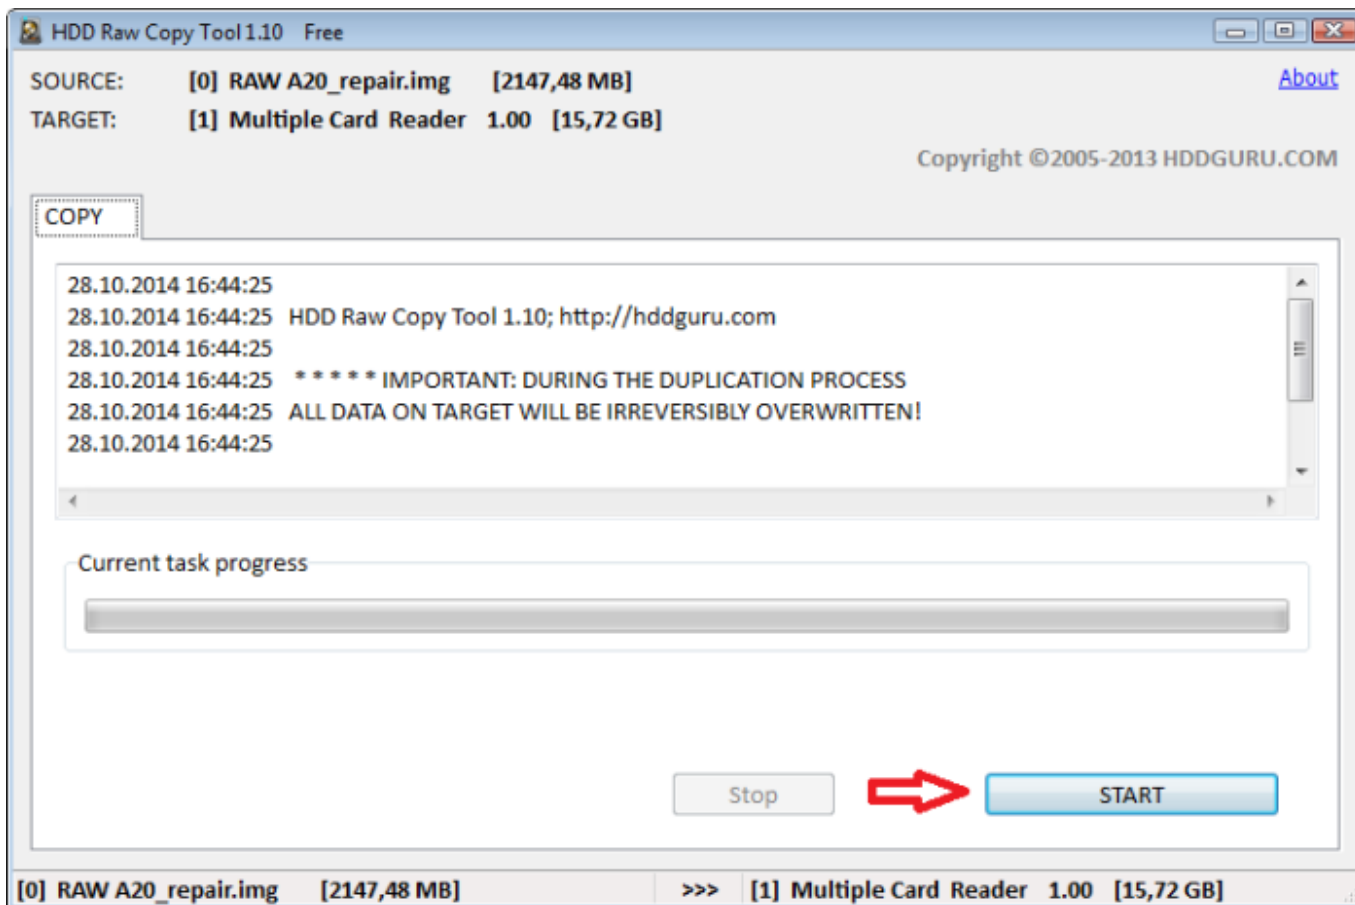

- 3. Turn off STB and connect SD card to port on the back side of STB.

MicroSD port on the back side



- **4.** Turn on STB and wait for updating.



Take into account that updating proceed on background and do not display. STB will turned off after updating is complete - in this way you can determine that updating is complete.

- **5.** Remve SD card and turn on STB.

From:
<https://docs.infomir.com.ua/> -

Permanent link:
https://docs.infomir.com.ua/doku.php?id=en:stb_android:faq:update

Last update: **2019/05/17 11:23**

