

EPG

Supported format: **XMLTV** - . More details about format

XMLTV:http://wiki.xmltv.org/index.php/Main_Page

<spoiler|epg screen>

EPG settings

[<< Back](#) | [Update EPG](#) | [Force update EPG](#)

ID	URI	ID prefix	ETag/MD5	Updated	
1	http://example.com/example.xml		"3c2301-4f4c85-4e45e5fe965a9"	2013-08-20 13:21:00	on edit del

URI

ID prefix:

</spoiler>

- **Update EPG** - EPG update while source changes. Updating according to the latest/new changes;
- **Force update EPG** - Full update EPG for all channels.
- **ID** - id of EPG file in MySQL database;
- **URL** - URL of xmltv file. Example: **http://example.com/example.xml**
- **ID prefix** - When using multiple sources of EPG can be specified **prefix** for each source in the format `prefix_;`

<spoiler|epg edit using prefix>

EPG settings

[<< Back](#) | [Update EPG](#) | [Force update EPG](#)

ID	URI	ID prefix	ETag/MD5	Updated	
1	http://example1.com/example1.xml	epg1_	"3c2301-4f4c85-4e45e5fe965a9"	2013-08-20 13:21:00	on edit del
2	http://example2.com/example2.xml	epg2_	"3c260c-4f4886-4e45e5ff21069"	2013-08-20 13:21:02	on edit del
3	http://example3.com/example3.xml	epg3_	"3c260d-4f433b-4e45e5ffaab89"	2013-08-20 13:21:03	on edit del

URI

ID prefix:

</spoiler>


- **Etag/MD5** - control sum of xmltv file;
- **Updated** - date of the latest EPG update;
- **edit** - source updating;
- **del** - source removing.

Using

- Add the correct **EPG** source (in **xmltv** format). More details about **XMLTV**: http://wiki.xmltv.org/index.php/Main_Page;
- In "IPTV channels" - in channel editing mode the field "xmltv id" it is needed to put necessary **channel id** from **xmltv file**. If the source prefix is used than it is necessary to put prefix_id.
- In "EPG settings" - press "Update EPG"/"Force update EPG".

If all steps were done correctly, than in the top of section "EPG settings" should be next:

<spoiler|epg update screen>

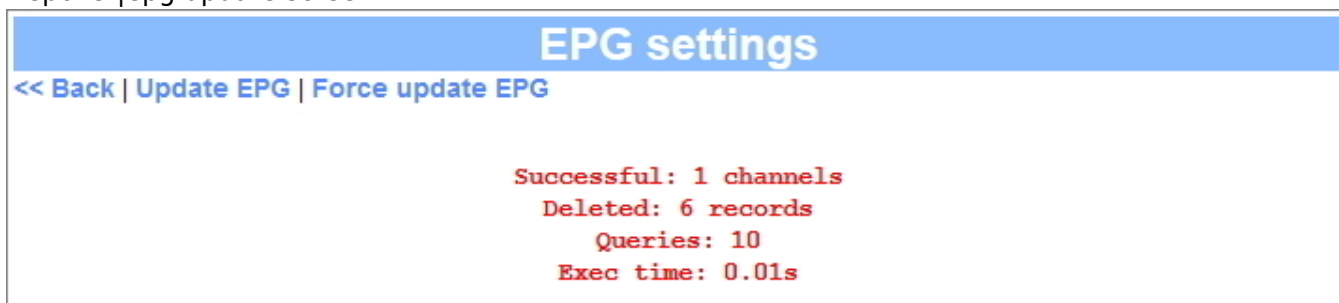

</spoiler>

Content of xmltv file for example:

```
<?xml version="1.0" encoding="windows-1251"?>
<!DOCTYPE tv SYSTEM "xmltv.dtd">
<tv source-info-url="http://example.com/" source-info-name="ExampleName"
generator-info-url="http://www.xmltv.org/">
<channel id="111">
  <display-name lang="ru">Channel-1</display-name>
  <icon src="http://example.com/pic/channel_logos/111.gif" />
</channel>
<channel id="222">
  <display-name lang="ru">Channel-2</display-name>
  <icon src="http://example.com/pic/channel_logos/222.gif" />
</channel>
<channel id="333">
  <display-name lang="ru">Channel-3</display-name>
  <icon src="http://example.com/pic/channel_logos/333.gif" />
</channel>
...
```

where is:

- <channel id="111">

111 - Channel id

- `<display-name lang="ru">Channel-1</display-name>`

Channel-1 - Channel Name

From:

<http://docs.infomir.com.ua/> -

Permanent link:

<http://docs.infomir.com.ua/doku.php?id=en:stalker:epg>

Last update: **2019/05/17 11:23**

